


787

787 90° ADAPTOR, GLOBALLY APPROVED, EXPLOSIVE ATMOSPHERE CABLE / CONDUIT ACCESSORY

- Protects cables from excessive bending stress
- General purpose / industrial version available
- Supplied with male or female threads
- Can be supplied with thread conversion
- Equipment interface 'O' ring seal available
- -60°C to +200°C
- Globally marked, IECEx, ATEX & cCSAus
- Can be used with 737 (not Ex d direct entry applications)

Machined and cast M20 to M50


Machined M63 and above



TECHNICAL CLASSIFICATION

DESIGN SPECIFICATION	BS 6121:Part 1:1989
ENCLOSURE PROTECTION	IK10 to IEC 62262 (20 joules) Brass & Stainless Steel Only
INGRESS PROTECTION RATING**	IP66, IP67 & IP68***
AVAILABLE MATERIALS	Brass, Electroless Nickel Plated Brass, Aluminium, Stainless Steel

** When CMP installation accessories are used. Refer to www.cmp-products.com for further information. *** IP68 tested to a minimum depth of 30 metres for 12 hours, alternate depths / durations can be provided upon request

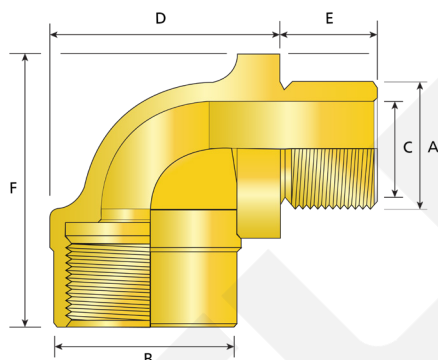

GLOBAL PRODUCT CERTIFICATION

ATEX CERTIFICATE	CML18ATEX1319U	IECEx CERTIFICATE	IECEx CML18.0176U, IECEx SIM 17.0009U
CODE OF PROTECTION	II 2G 1D Ex db IIC Gb, Ex eb IIC Gb, Ex ta IIIC Da I M2 Ex db I Mb, Ex eb I Mb	CODE OF PROTECTION	Ex db I Mb, Ex eb I Mb, Ex db IIC Gb, Ex eb IIC Gb, Ex ta IIIC Da
COMPLIANCE STANDARDS	EN 60079-0,1,7,31	COMPLIANCE STANDARDS	IEC 60079-0,1,7,31
cCSAus CERTIFICATE (20S16-100)	1055233		
CODE OF PROTECTION	Class I, Groups A, B, C and D; IP66, 67, 68; Enclosure Type 4X; Ex de II, Class I, Zone 1, AEx de II;		
COMPLIANCE STANDARDS	C22.2 No. 0, 0.5-M1982, 30, 94, CAN/CSA 60079-0,1,7, UL 50, Edition 11, UL 1203, Edition 4, UL 60079-0,1,7		
EAC CERTIFICATE	TC RU C-GB-AA87.B.00487	UKrSEPRO	CLQ 19.0370U
RETIE APPROVAL NUMBER	03866	INMETRO APPROVAL	TÜV 12.1335U
NEPSI CERTIFICATE	GYJ18.1254U	ECAS CERTIFICATE	20-02-05268
MARINE APPROVALS	LRS: 01/00173, BV: 43180 A1 BV, ABS: 17-LD1619350-PDA		

HOW TO ORDER

e.g. 787 - D - M - 3 - M - 3 - 5

= Dual certified Ex d & Ex e - M25 (M) x M25 (F) - Nickel Plated Brass

Other thread variations are available on request. For further information on ordering please refer to page 163.

PRODUCT SELECTION TABLE

ORDERING REFERENCE	MALE THREAD SIZE "A"	MINIMUM THREAD LENGTH "E"	MINIMUM BORE DIAMETER "C"	FEMALE THREAD SIZE	PROTRUSION LENGTH "D"	PROTRUSION LENGTH "F"	WIDTH "B"	INSTALLATION TORQUE (NM)
787DM2M2	M20 X 1.5	15.3	14.0	M20 X 1.5	29.6	41.0	24.0	7
787DM3M3	M25 X 1.5	15.3	18.6	M25 X 1.5	36.3	49.3	29.0	10
787DM4M4	M32 X 1.5	15.3	25.6	M32 X 1.5	45.2	56.3	36.0	15
787DM5N5	M40 X 1.5	15.3	33.6	M40 X 1.5	54.2	64.8	44.0	25
787DM6M6	M50 X 1.5	15.3	41.0	M50 X 1.5	68.3	74.0	54.0	30
787DM7M7	M63 X 1.5	15.3	50.0	M63 X 1.5	97.0	104.3	75.3	45
787DM8M8	M75 X 1.5	15.3	61.0	M75 X 1.5	97.0	111.3	79.5	45
787DM9M9	M90 X 2.0	15.3	80.0	M90 X 2.0	100.0	131.3	110.0	45
787DM10M10	M100 X 2.0	15.3	91.0	M100 X 2.0	110.0	141.3	115.0	45

All dimensions shown are in millimetres unless otherwise stated

Dimensions listed are for metric cable glands only. Dimensions for alternative threads may vary, please see supplementary technical data sheet.